

DTS 3031 (NEMA 3R_4), DTS 3031 (NEMA 4_4X) COOLING UNITS 306-350 W



DTS 3031 (NEMA 3R/4) **I DTS 3031** (NEMA 4/4X) **COOLING UNITS** 306–350 W

- compact design, ideal for small control cabinets and larger control cabinets for the cooling of hot spots
- suitable for the food and beverage industry and outdoor applications
- maintains a UL tested NEMA type 3R/4 and 4/4X seal against the enclosure
- high protection system IP 56, maintenance-free
- condenser with 3 mm fin spacing, highly effective protection against strongly contaminated ambient air
- fully coated heat-exchangers and tubing
- suitable for smallest enclosures




PRODUCT ARTICLE NO. SC		DTS 3031	(NEMA 3R/4)	DTS 3031		
		13383141355	13383144355	13383141158	13383144158	Unit
DATA						
Detectorality of 40.0/		AC 50 60	AC 60	AC 50 60	AC 60	Hz
Rated voltage ±10 %		230	115	230	115	V
Cooling capacity according to EN 14511	A35/A35	306 322	350	306 322	350	W
Power consumption	A35/A35	253	243	253	243	
Current consumption	A35/A35	1.2	2.1	1.2	2.1	Λ
Starting current	A35/A35	3.5	5	3.5	5	A
Unimpeded airflow	internal	64				
(free flow)	external	169				
Pre fuse T		15				
Type of connection		permanently installed electrical plug / cable strands (CE)				
Noise level according to EN ISO 3741		< 64				
Weight (without packaging)		14				
Ambient temperature		+ 8 + 45 / + 46 + 114				
Control range (adjustable)		+ 10 + 40 + 50 + 104; factory setting + 35 + 95				
Refrigerant R134a		145-150				
Duty cycle		100				
Condensate management		integrated condensate evaporation system with safety overflow				
Protection system according to NEMA type	3R/4	towards the electrical enclosure if used as intended by the manufacturer				
	4/4X	-	_	towards the election if used as intended		
	1	towards the surroundings if used as intended by the manufacturer				
Design	housing	J	sheet steel	galvanised		
	cover		cally powder coated (200 C)	stainless		
Colour		RAL 7035 different col	ours available on reques	t -	_	

ACCESSORIES Pi		ARTICLE NUMBER			
Condensate bottle	1	18314000100			
Alu filter	1	18881500008			
For additional models, options and voltages visit www.pfannenberg.com or contact us directly.					

For additional information to ensure the accurate setting of the motor protection switch, please see technical specific data sheet. This information is included with the delivery of the unit or can be found at www.pfannenberg.com.



Cooling capacity performance curves

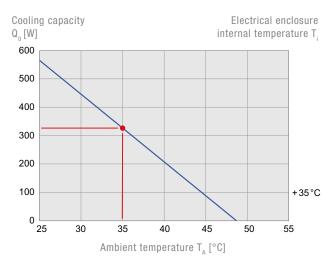


CULSTED ERE C€


Dimensions

	Х	Y	Z	A	В	C	D	E	F
mm	177.8	393.7	191.4	135	124	328	128	146	162

Mounting holes Ø 10 mm

DTS 3031

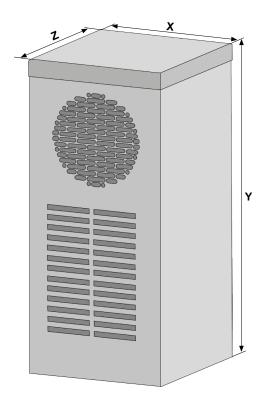

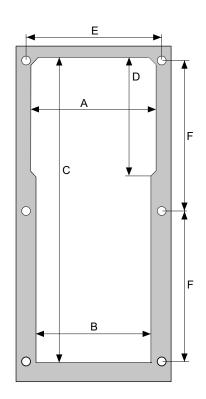



+44 (0)121 544 6808 | <u>info@cnet-is.co.uk</u>

C-NET Industrial Solutions Limited

Suite 12, Sandwell Business Centre Oldbury Road **Smethwick** B66 1NN **United Kingdom**