



**PF 11.000 EMC, PFA 10.000 EMC  
ECOOL FILTERFAN, EXHAUST FILTER  
25–29 m<sup>3</sup> \_h**

# PF 11.000 EMC | PFA 10.000 EMC

## ECOOL FILTERFAN | EXHAUST FILTER 25–29 m³/h

- installation size 1, air flow rate up to 29 m³/h
- secure contact due to improved contact springs on the screen grid
- system of protection IP 54, NEMA type 12
- UL, cUL approval
- cut-out compatible to installation size 1 of the 3rd and 4th Generation



PRODUCT		PF 11.000 EMC				
ARTICLE NO.	IP 54	11811101055	11811151055	11811801055	11811701055	Unit

DATA

Rated voltage ±10 %	AC 50   60 Hz		DC		V
	230	115	24	48	
Unimpeded airflow	25   29				m³/h
Airflow rate in combination with exhaust filter	16   18				
Power consumption	12   11		2.4	2.6	W
Current consumption	0.07   0.06	0.15   0.15	0.1	0.05	A
Noise level according to EN ISO 3741	33   33		33		dB (A)
Weight	0.58		0.19		kg
Type of connection	cable, 2-core, length 310 mm				
Fuse	6				A
System of protection according to EN 60529 / UL 50	NEMA type 12 - standard filter				
Filtration efficiency	88				%
Filter mat quality class according to EN 779	G 3				
Duty cycle	100				%
Bearing type	sleeve bearing		ball bearing		
Service life L <sub>10</sub> (+ 40 °C) <sup>1</sup>	52500	55000	70000		h
Temperature range	-40 ... +55   -40 ... +131				°C   °F
Design (housing and protection against accidental contact)	made of injection-moulded thermoplastic, self-extinguishing, UL 94 V0				
EMC screen	stainless steel				
Colour	RAL 7035   different colours available on request				


ACCESSORIES		ARTICLE NUMBER
Exhaust filter		11910001055
Spare filter mats	5 pieces	18611600029
Thermostat		17121000000
Hygrostat		17207000000
Rainhood in stainless steel		18102000014

For additional models, options and voltages visit [www.pfannenber.com](http://www.pfannenber.com) or contact us directly.


<sup>1</sup> fan failure is defined as being when the current and speed deviate or the operating noises are out of the ordinary



### Cooling capacity performance curves

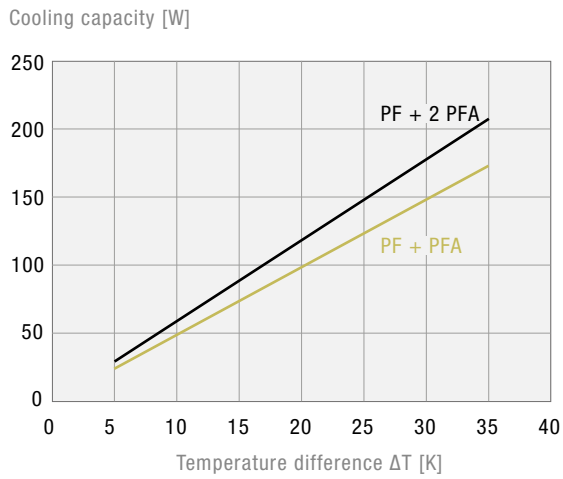


### Static pressure performance curve

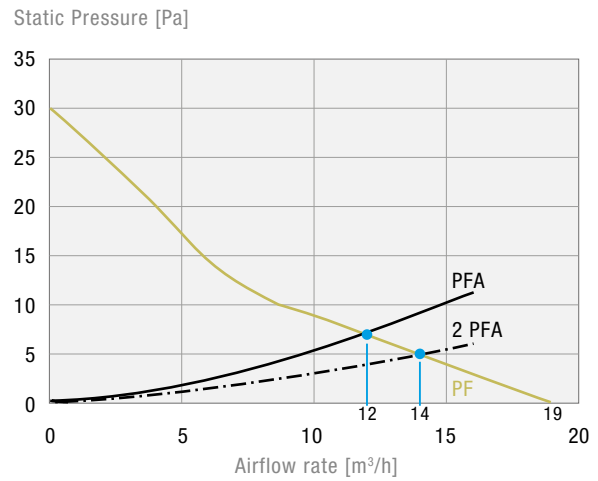

### Dimensions

mm	PF 11.000 EMC		PFA 10.000 EMC
	AC	DC	
<b>X</b>	109	109	109
<b>Y</b>	109	109	109
<b>Z1</b>	4	4	4
<b>Z2</b>	62	49	19
<b>A</b>	93	93	93
<b>B</b>	93	93	93

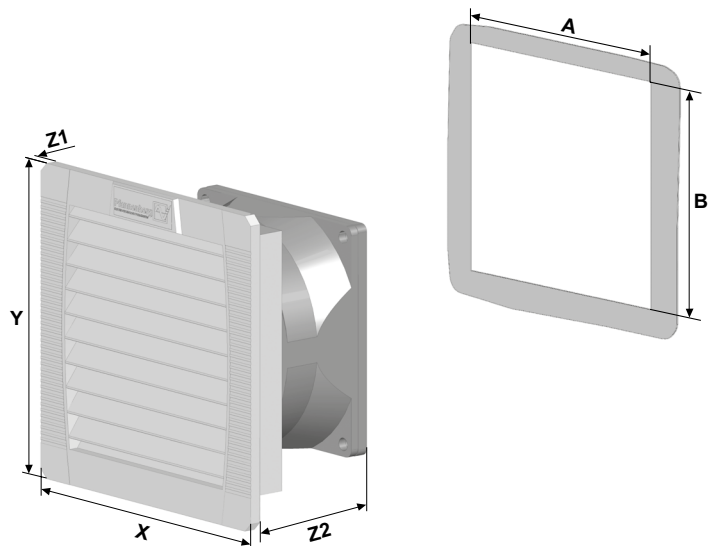



+44 (0)121 544 6808

| [info@cnet-is.co.uk](mailto:info@cnet-is.co.uk)

**C-NET Industrial Solutions  
Limited**

Suite 12, Sandwell Business Centre  
Oldbury Road  
Smethwick  
B66 1NN  
United Kingdom